

# CalCarb® M2 AMF

## Asphalt Mineral Filler


### Ground Calcium Carbonate

#### PRODUCT DESCRIPTION

The Mississippi Lime CalCarb® Calcium Carbonate family of products is mined from the high purity formation in Ste. Genevieve, Missouri which consists of limestone with an average calcium carbonate content of 98.5%. CalCarb® M2 Asphalt Mineral Filler is used in both standard mineral filler applications as well as more demanding stone mastic asphalt formulas.

TYPICAL CHEMICAL PROPERTIES	
CaCO <sub>3</sub>	98.5%
MgCO <sub>3</sub>	0.6%
SiO <sub>2</sub>	0.5%
Al <sub>2</sub> O <sub>3</sub>	0.1%
Fe <sub>2</sub> O <sub>3</sub>	0.06%
H <sub>2</sub> O	0.1%

TYPICAL PHYSICAL PROPERTIES	
-30 Mesh (600 µm)	99.9%
-60 Mesh (250 µm)	99.5%
-80 Mesh (180 µm)	97%
-100 Mesh (150 µm)	95%
-200 Mesh (74 µm)	75%
-270 Mesh (53 µm)	65%
-325 Mesh (45 µm)	60%
Apparent Dry Bulk Density - Loose	73 lbs/ft <sup>3</sup>
Apparent Dry Bulk Density - Packed	105 lbs/ft <sup>3</sup>

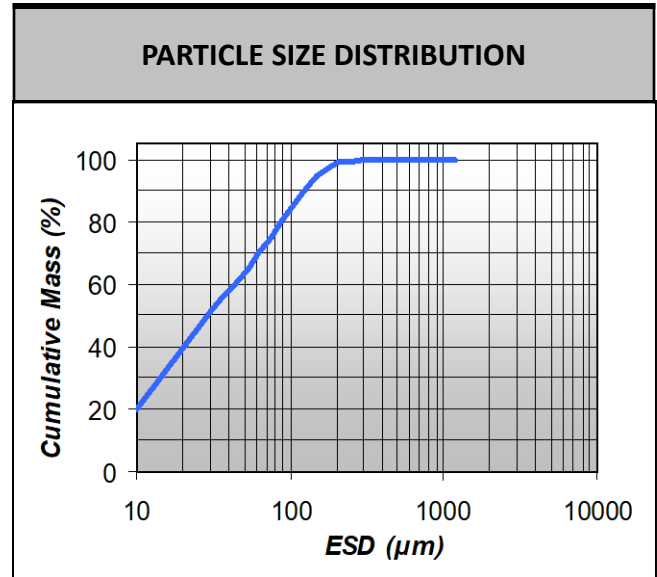

- ✓ Certified to ASTM D242-19
- ✓ Certified to AASHTO M17-11