



CalCarb® M2 Asphalt Mineral Filler

Ground Calcium
Carbonate

TECHNICAL DATA SHEET

Product Description

The MLC CalCarb® Calcium Carbonate family of products is mined from the high purity formation in Ste. Genevieve, Missouri which consists of limestone with an average calcium carbonate content of 98.5%. CalCarb® M2 Asphalt Mineral Filler is used in both standard mineral filler applications as well as more demanding stone mastic asphalt formulas.


Typical Chemical Properties

CaCO ₃	98.5%
MgCO ₃	0.6%
Silica (SiO ₂)	0.5%
Alumina (Al ₂ O ₃)	0.1%
Iron (Fe ₂ O ₃)	0.06%
Free Moisture	< 0.2%

Typical Physical Properties

-30 Mesh (600 µm)	99.9%
-60 Mesh (250 µm)	99.5%
-100 Mesh (150 µm)	95%
-200 Mesh (74 µm)	75%
-270 Mesh (53 µm)	65%
-325 Mesh (45 µm)	60%
Apparent Dry Bulk Density - Loose	73 lbs/ft ³
Apparent Dry Bulk Density - Packed	105 lbs/ft ³

Particle Size Distribution

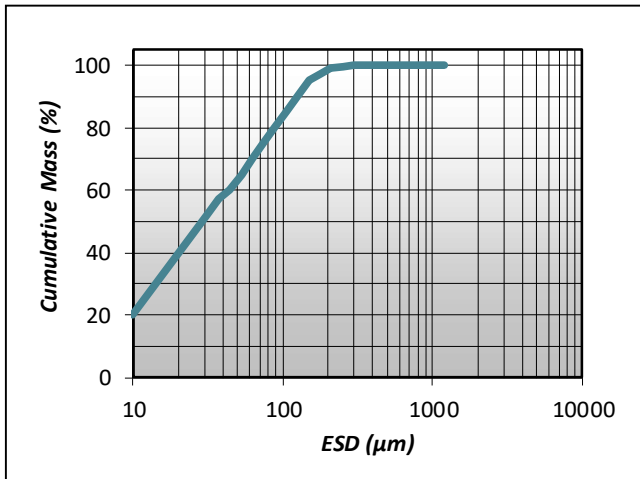

Available Certifications

- ✓ ASTM Standard: D242-19
- ✓ AASHTO Standard: M17-11

mlc.com

sales@mlc.com | 800.437.5463

All information provided and recommendations made herein are intended to assist customers in determining whether our products are suitable for their applications. The values associated with all chemical and physical properties herein are typical values and are not intended to be used as product specifications or guarantees. ALL EXPRESS AND IMPLIED WARRANTIES ARE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. We request that customers inspect and test our products before use in order to make their own final decision regarding suitability. We do not guarantee results, freedom from patent infringement, or suitability of resultant products for any suggested application with respect to the use of any formula or material described herein.