



Feed Grade Limestone F1

Ground Calcium Carbonate

TECHNICAL DATA SHEET

Product Description

Feed Grade Limestone F1 is mined from the high purity formation in Ste. Genevieve, Missouri which consists of limestone with an average calcium carbonate content of 98.5%. Feed Grade Limestone F1 is a granular material used in mineral feeds because of its high calcium content and consistent particle size.


Typical Chemical Properties

CaCO ₃	98.5%
MgCO ₃	0.7%
Silica (SiO ₂)	0.5%
Alumina (Al ₂ O ₃)	0.08%
Iron (Fe ₂ O ₃)	0.05%
Free Moisture	< 0.2%

Typical Physical Properties

-16 Mesh (1190 µm)	99.9%
-20 Mesh (840 µm)	95%
-30 Mesh (590 µm)	74%
-60 Mesh (250 µm)	28%
-100 Mesh (150 µm)	8%
-120 Mesh (125 µm)	6%
-140 Mesh (105 µm)	4%
-200 Mesh (74 µm)	2%
Apparent Dry Bulk Density - Loose	56 lbs/ft ³
Apparent Dry Bulk Density - Packed	104 lbs/ft ³

Particle Size Distribution

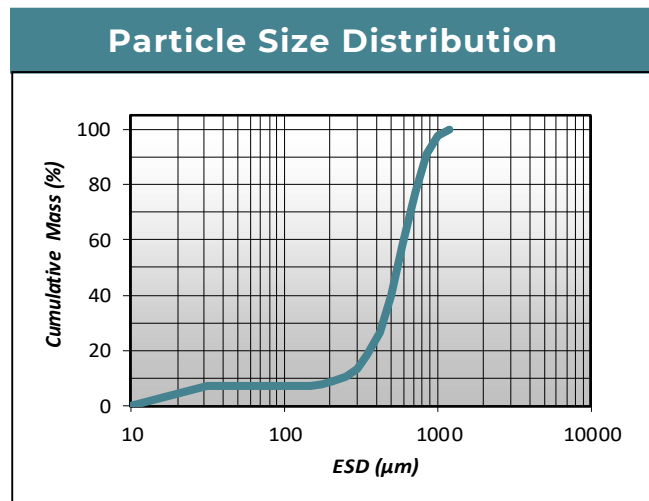

Available Certifications

- ✓ ASTM Standard: C706-19 for animal feed use

mlc.com

sales@mlc.com | 800.437.5463

All information provided and recommendations made herein are intended to assist customers in determining whether our products are suitable for their applications. The values associated with all chemical and physical properties herein are typical values and are not intended to be used as product specifications or guarantees. ALL EXPRESS AND IMPLIED WARRANTIES ARE DISCLAIMED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. We request that customers inspect and test our products before use in order to make their own final decision regarding suitability. We do not guarantee results, freedom from patent infringement, or suitability of resultant products for any suggested application with respect to the use of any formula or material described herein.